

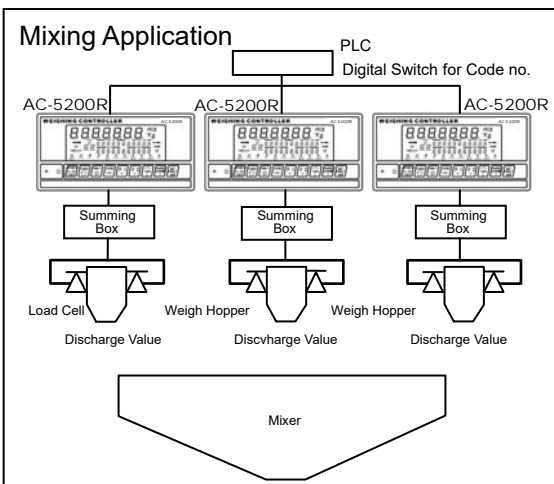


WEIGHING INDICATOR

AC-5200R

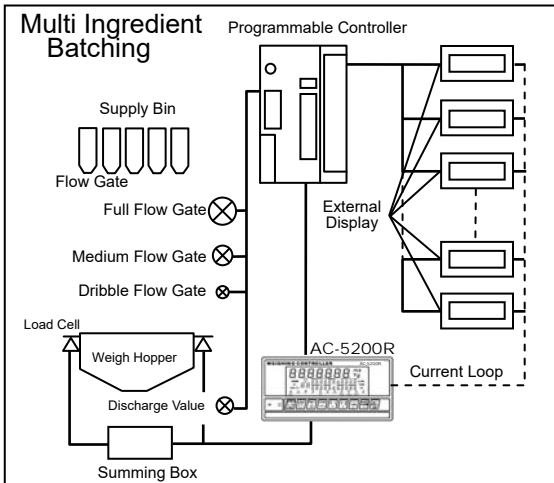

AC-5200R Digital weighing indicator of compact, High Quality, High Performance, Built in Serial Current Loop output & RS232/422/485 Modbus RTU. 8 Control Input & 8 Control output. Stores 100 data for raw materials & 100 data for recipe codes. Easy to operate the batch weighing functions. AC-5200R Unrivalled for batching control application.

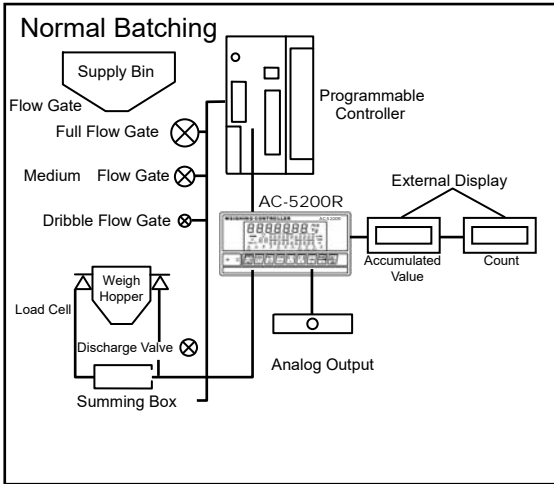


OPTIONAL INTERFACES

02 Analog output 0-10V or 4-20mA

04 8 Relay Output With DC24V Power Supply

DIMENSIONS

UNIT:mm

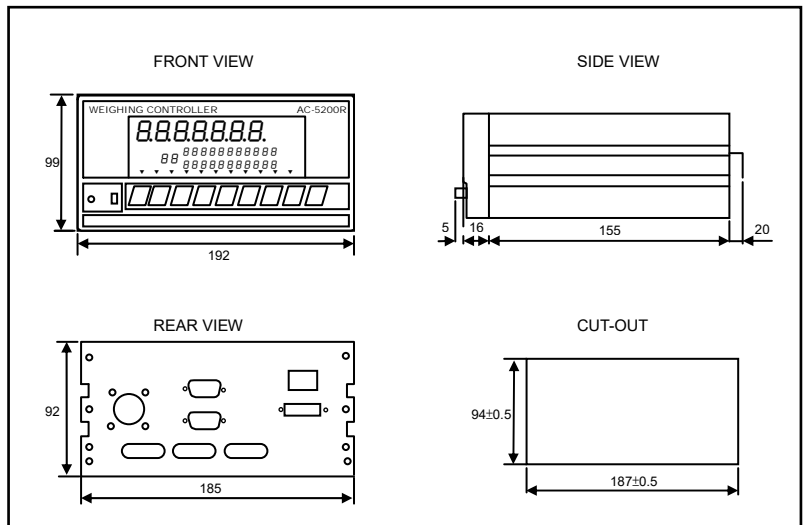

Specifications

Power Requirement	85~265VAC, 50/60Hz
Power Consumption	7.5W
Line Fiter	Built-in
Load Cell Excitation	5VDC 114mA max. 4X350 ohm load cells
Input Sensitivity	0.2μV/d
Zero Adj. Range	0mV ~+19mV
Input Range	0mV ~+19mV
Max. Display	100,000 divisions
Resolution	Max. 520,000 count
Internal Resolution	100 times/sec. Delta-sigma
A/D Conversion Rate	1, 2, 5, 10, 20, 50/step
Display Increment	1, 2, 5, 10, 20, 50/step
Operating Temperature	-5°C to +50°C
Relative Humidity	90% RH Max.(Non-Condensing)
Temp. Coefficient	Less than (0.005% of reading +0.3 digits)°C
Non-Linearity	±0.005% of full scale
I/O Port	8 (Photo Couple) Input / 8 (Relay) Output
Comm.Port	RS232/422/485 Modbus RTU, Current Loop
Installing Type	Panel Mounting
Net Weight	Approx 1.65kg
Physical Dimension	192(W) X 96 (H) X 180(D) mm
Panel Cutout Dimension	186(W) X 92(H)mm