

REMOTE DISPLAY

AC-9128D / AC-9128DC / AC-9129D

2.3"

888888


4"

888888


REMOTE DISPLAY

MODEL		AC-9128D	AC-9128DC	AC-9129D
SPECIFICATION				
DISPLAY	DIGIT SIZE	2.3"(5.8cm)	2.3"(5.8cm)	4"(10cm)
	CONTENTS	5 active digits	5 active digits	5 active digits
POWER REQUIREMENTS		100~240VAC	24VDC	100~240VAC
INPUT INTERFACES		RS-485	RS-485	RS-485
MODE		Master/Slave Can Be Select	Master/Slave Can Be Select	Master/Slave Can Be Select
ADDRESS		1 ~ FF(16Hex)	1 ~ FF(16Hex)	1 ~ FF(16Hex)
BAUDRATE		2400/4800/9600/19200	2400/4800/9600/19200	2400/4800/9600/19200
FRAME		N.8.2 , E.8.1 , O.8.1 , N.8.1	N.8.2 , E.8.1 , O.8.1 , N.8.1	N.8.2 , E.8.1 , O.8.1 , N.8.1
PROTOCOL		Modbus RTU Mode	Modbus RTU Mode	Modbus RTU Mode
DIMENSION		270(W)x100(H)x60(D)mm	270(W)x100(H)x60(D)mm	550(W)x150(D)x60(D)mm

CONNECTION DIAGRAM

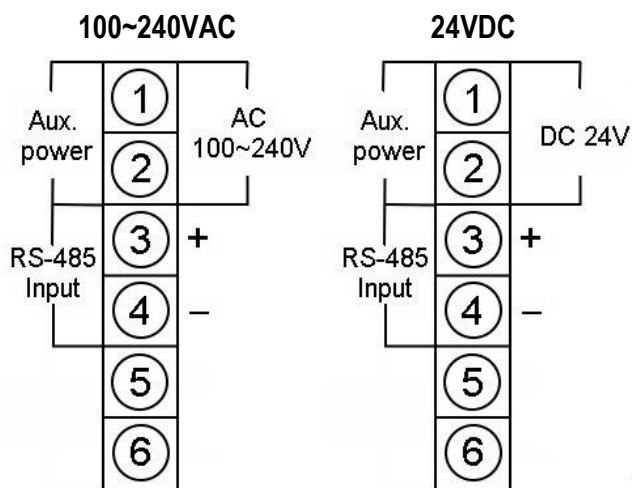

AC-9128D/AC-9128DC

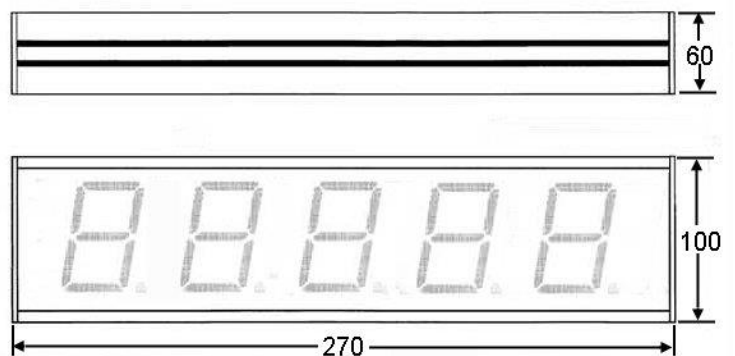

AC-9129D

UNIT: mm

