



Model : ARI6

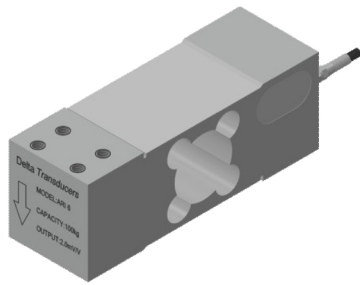


Features & Application

Single point parallel beam, aluminium load cell, used for electronic scales, platform scales and industrial weighing systems.

Mounting Dimension

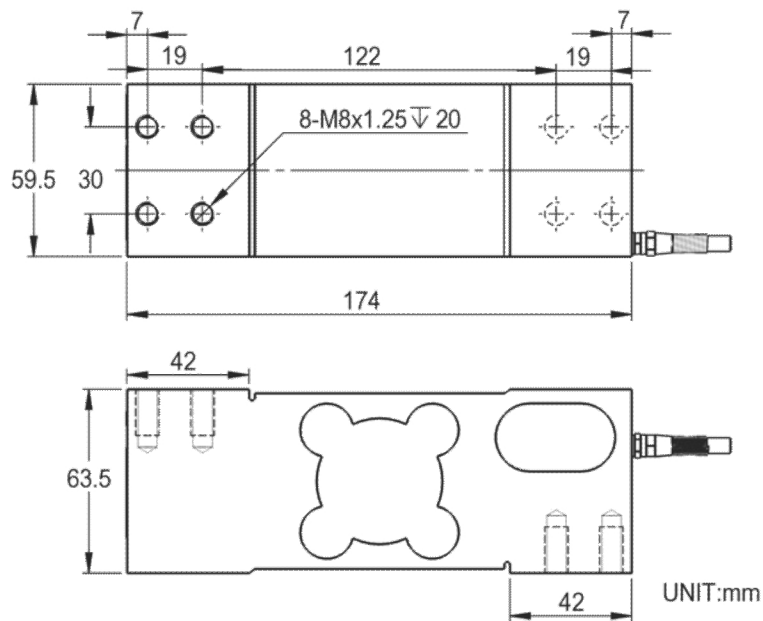

Wiring



Technical Parameters

Specifications	Technique
Rated load	60、100、200、300、500、800 kg
Rated Output	2.0 mV/V $\pm$ 5%
Zero balance	$\pm$ 0.0200mV/V
Non-linearity	0.017%R.O.
Hysteresis	0.017%R.O.
Repeatability	0.017%R.O.
Creep (30mins)	0.017%R.O.
Safe overload	150%F.S.
Ultimate overload	200%F.S.
Temp.effect on output	0.0015%R.O./ $^{\circ}$ C
Temp.effect on zero	0.002%R.O./ $^{\circ}$ C
Input impedance	410 $\pm$ 15 Ω
Output impedance	350 $\pm$ 5 Ω
Insulation resistance	$\geq$ 5000M Ω / 50VDC
Recommended Excitation	5~12VDC
Operating temp. range	-20~60 $^{\circ}$ C
Cable	ϕ 5x2m