



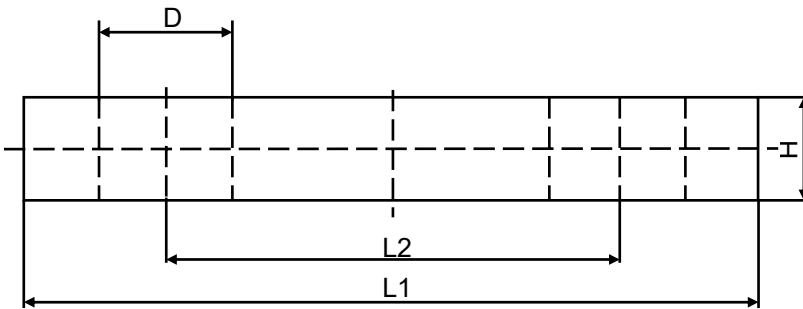

Crane scale, hopper scale, packing scale, overload limiter

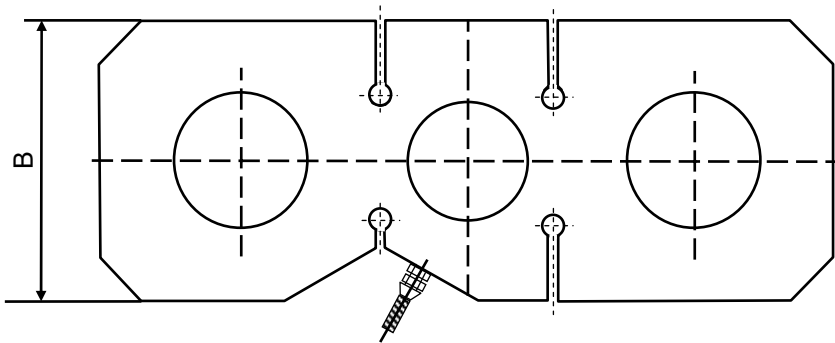

Rated Load(t)	L1	L2	B	D	H
15, 20, 30	340	210	130	Φ63	48
50	620	438	171	Φ85.5	47
100, 150	500	305	190	Φ97	130

## TECHNICAL PARAMETER

Exc+(Red); Exc-(Black); Sig+(Green); Sig-(White)

Rated capacities	15,20, 30, 50, 100, 150t	Output resistance	352±3 Ω
Accuracy class	0.05	Insulation resistance	≥5000MΩ
Sensitivity	2.0±0.002mV/V(15~50t)	Temperature range, Compensated	-10℃ ~+40℃
	1.5±0.01mV/V(100~150t)	Temperature range, Operating	-30℃ ~+70℃
Non-linearity	±0.05 F.S	Maximum safe overload	150%F.S
Hysteresis error	±0.05%F.S	Ultimate overload	200%F.S
Creep error(30min)	±0.03%F.S	Excitation, recommend	10~12VDC
TC ZERO	±0.02F.S/10℃	Protection Class	IP67
TC SPAN	±0.02F.S/10℃	Construction	Alloy Steel
Input resistance	400±20 Ω	Cable Length	10m