

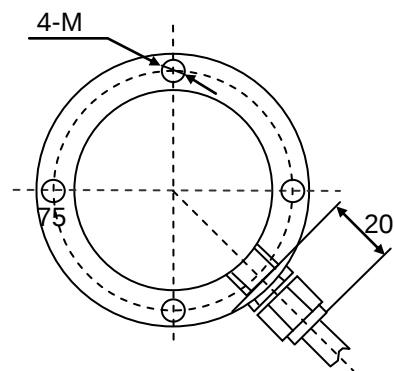


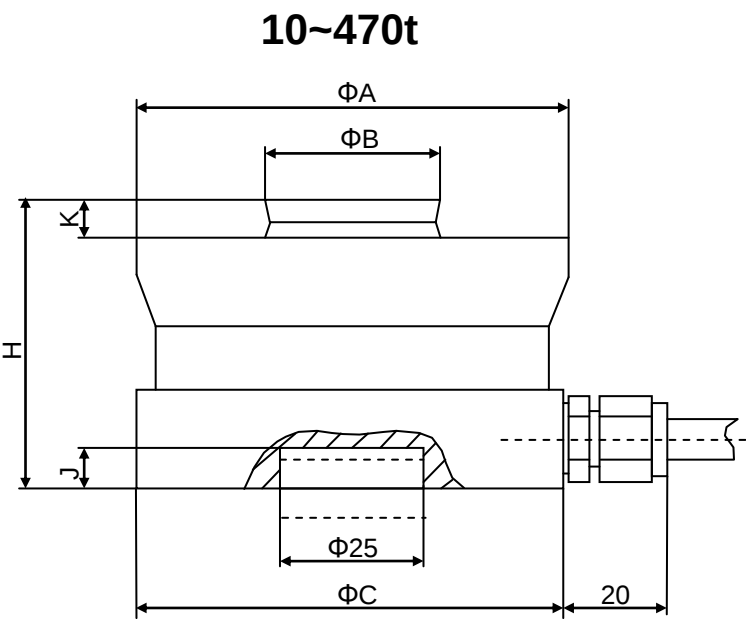

Rated Load(t)	A	B	C	H	K	J
10/15/22	75	30	75	50	7	6.5
33	95	40	95	65	7	10
47	130	60	130	75	7	14
68	130	60	130	85	7	14

Rated Load(t)	A	B	C	H	K	J
100	150	70	150	90	7	16
150	150	70	150	100	7	16
220	225	100	225	130	10	24
330	225	100	225	145	10	24
470	270	100	270	170	10	28

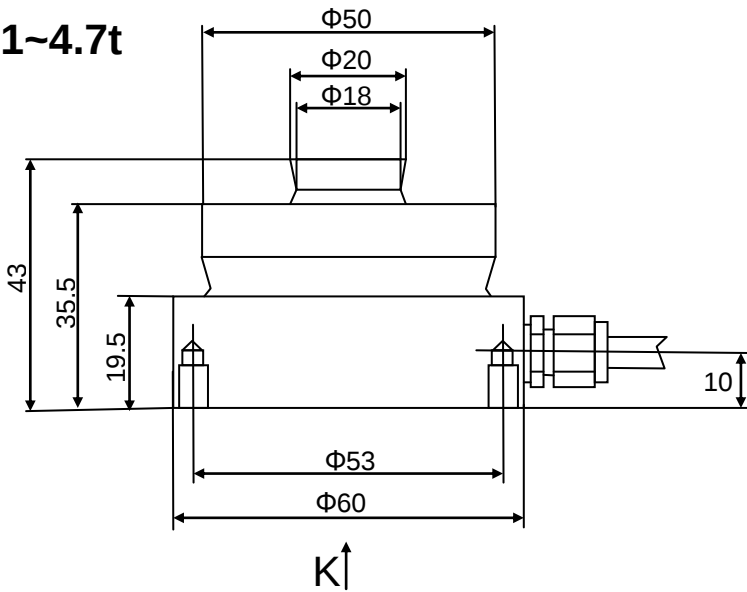


TECHNICAL PARAMETER


Exc+(Red); Exc-(Black); Sig+(Green); Sig-(White)

Rated capacities	1, 2.2, 3.3, 4.7, 10, 15, 22, 33, 47, 68, 100, 150, 220, 330, 470t		
Accuracy class	0.1(1~150t); 0.3(220~470t)	Temperature range, Compensated	-10℃ ~ +40℃
Sensitivity	2.85±0.015mV/V	Temperature range, Operating	-30℃ ~ +70℃
Non-linearity	±0.1%F.S(1~150t);	Maximum safe overload	150%F.S
	±0.3%F.S(220~470t);	Ultimate overload	200%F.S
Hysteresis error	±0.05%F.S(1~150t)	Excitation, recommend	10~12VDC
Creep error(30min)	±0.03%F.S	Protection Class	IP67
TC ZERO	±0.02F.S/10℃	Construction	Alloy Steel; Stainless steel
TC SPAN	±0.03F.S/10℃	Cable Length	8m(1~4.7t)
Input resistance	1450±10Ω		12m(10~33t)
Output resistance	1405±5Ω		16m(68~470t)
Insulation resistance	≥5000MΩ		

1~4.7t Assembly B

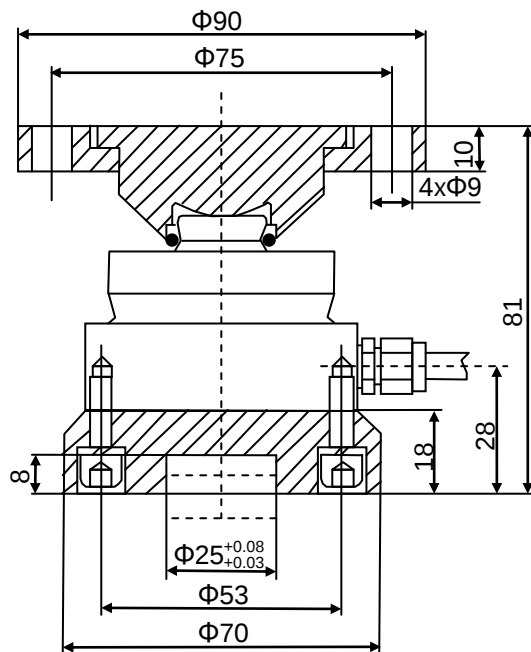


10~470t Assembly B

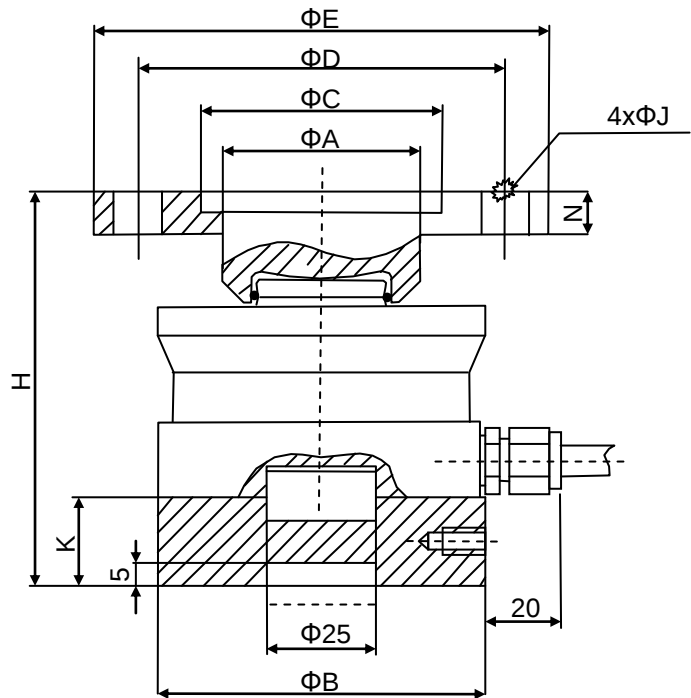


Rated Load(t)	A	B	C	D	E	H	K	J	N
10/15/22	45	75	55	80	100	95	20	11.5	10
33	58	95	68	95	120	120	25	13	12
47	80	130	92	130	170	140	30	17.5	20
68	80	130	92	130	170	150	30	17.5	20

Rated Load(t)	A	B	C	D	E	H	K	K	N
100	100	150	110	150	200	177	40	25	22
150	100	150	110	150	200	187	40	25	22
220	160	225	170	250	320	235	40	25	30
330	160	225	170	250	320	250	40	25	30
470	160	270	170	220	280	325	80	21.4	30

1~4.7t Assembly C

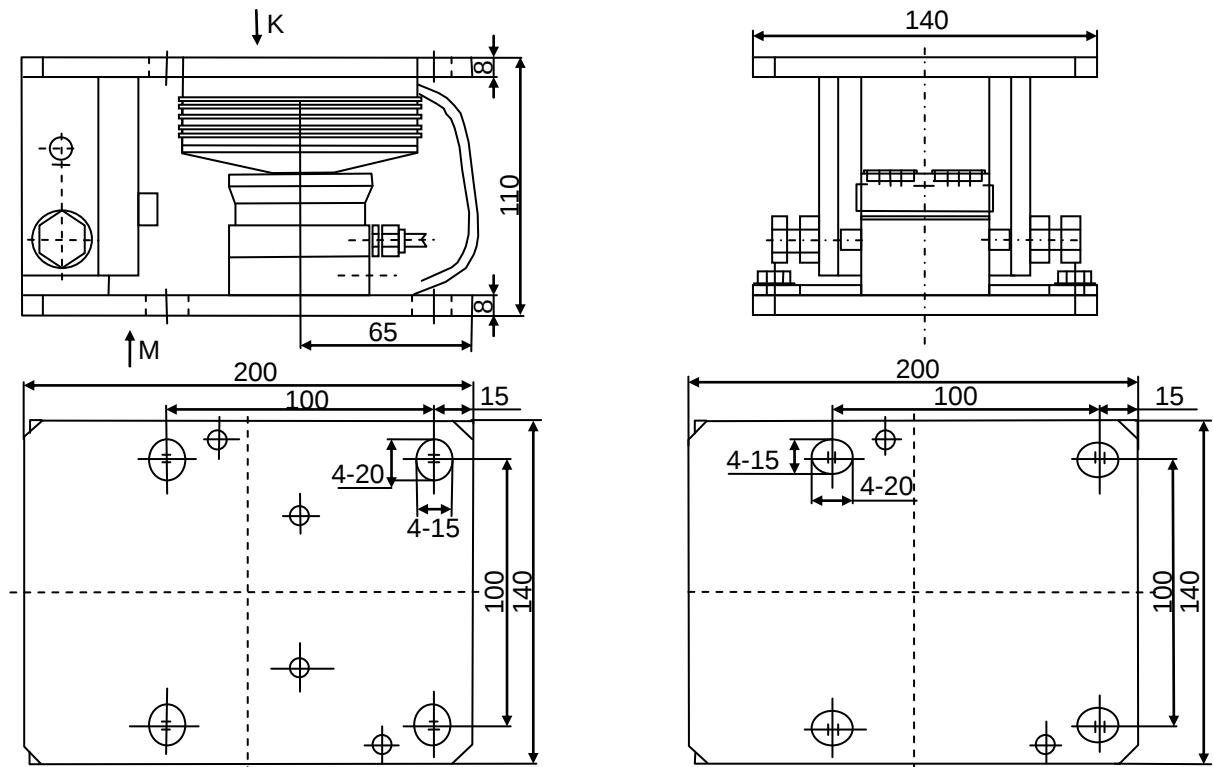

10~150t Assembly C

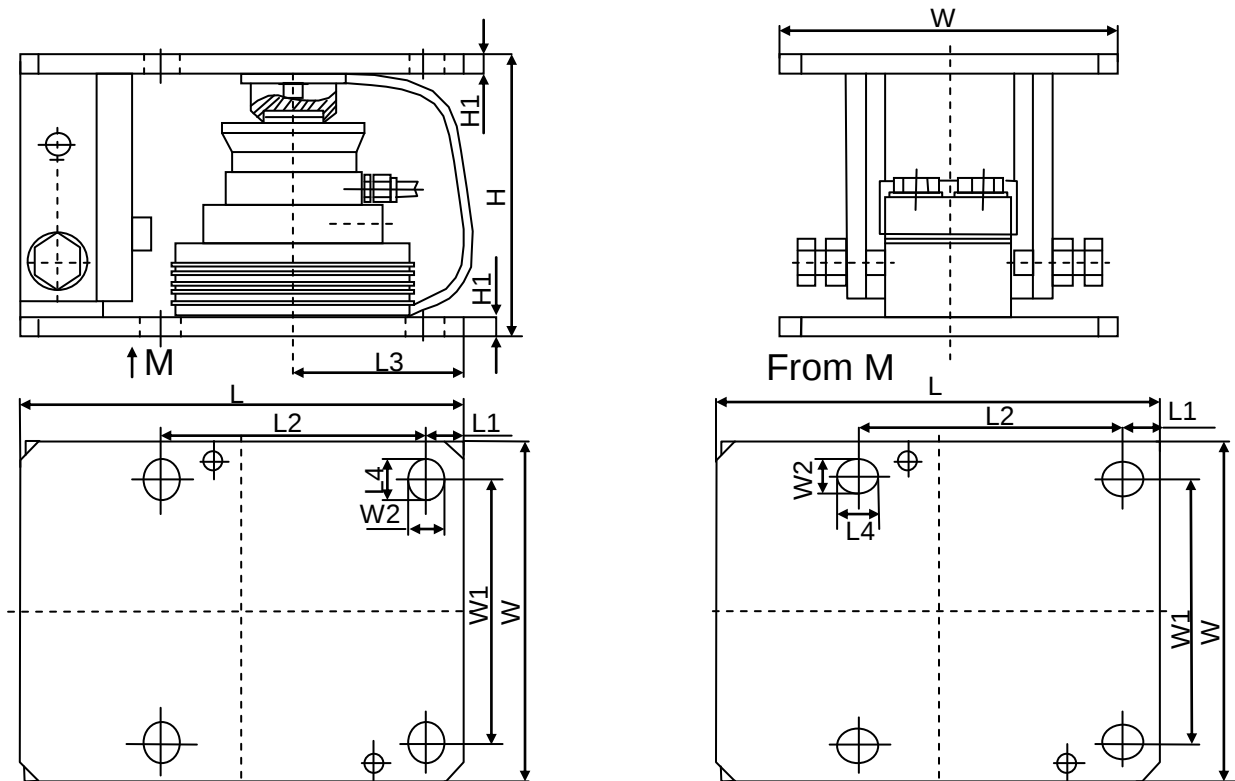

Rated Load(t)	L	L1	L2	L3	L4	W	W1	W2	H	H1
10~22	235	20	140	90	22	180	140	18	150	8
33	340	35	200	135	26	250	200	22	192	12
47	380	45	230	150	30	280	230	26	230	20
68	380	45	230	150	30	280	230	26	240	20
100	410	35	245	155	30	310	245	26	300	30
150	410	35	245	155	30	310	245	26	310	30