



DEBA5t
DEBA-10~40t



(t) Rated Load	5	10, 15, 20, 25, 30	40
D1	68	88	88
D2	50.8	76.2	76.2
H	168.8	224.7	230.7
L	224	240	240

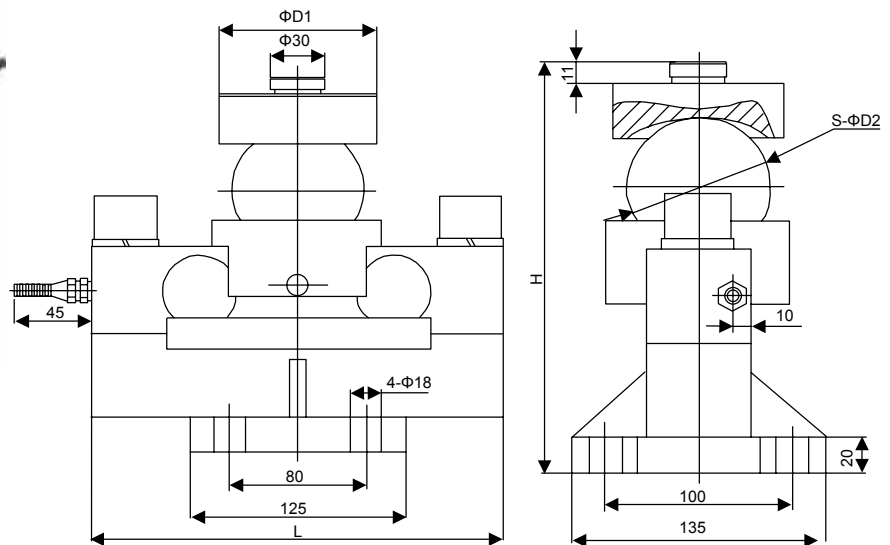

DEBA-50t

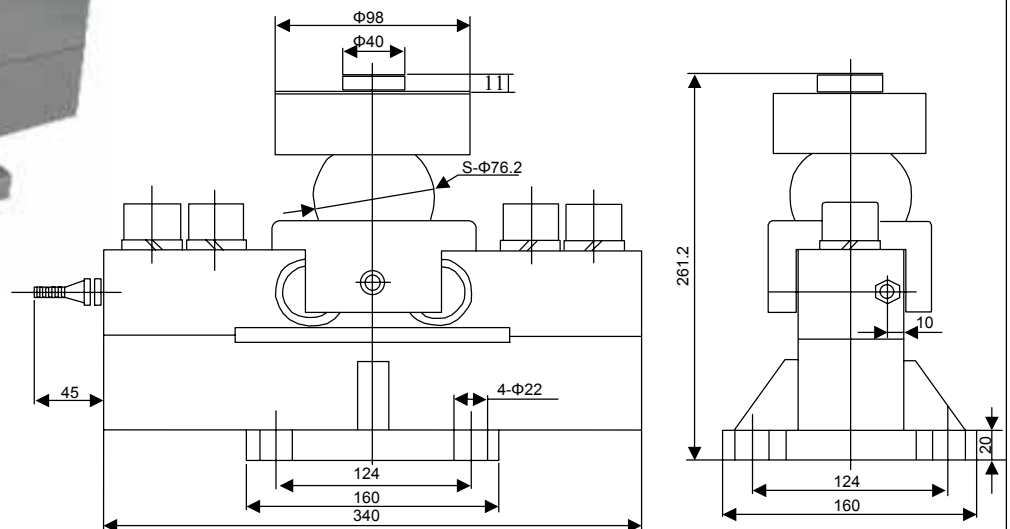

Technical Parameter

Rated load	5t, 10t, 15t, 20t, 25t, 30t, 40t, 50t	Nominal Temp Range		-10~+40°C					
Accuracy class	C2~C3	Service Temp Range		-30~+70°C					
Sensitivity	2.0± 0.002mV/V	Safe load limit		150%F.S					
Non-linearity	± 0.03%F.S	Breaking load		250%F.S					
Hysteresis error	± 0.03%F.S	Nominal of range excitation		10~12V DC					
Creep(30min)	±0.02%F.S	Protection Class		IP67					
TC ZERO	±0.02%F.S/10°C	Material		Alloy Steel / Stainless Steel					
TC SPAN	±0.02%F.S/10°C	Cable : Length							
Input resistance	750±10Ω	5t	10t	15t	20t	25t	30t	40t	50t
Output resistance	702±3Ω	5.2m	4/8m	4/10m	4/10/12m	4/10/12m	12/16m	12/16m	4/12/16m
Insulation resistance	≥5000MΩ	Exc+(Red); Exc-(Black); Sig+(Green); Sig-(White)							