
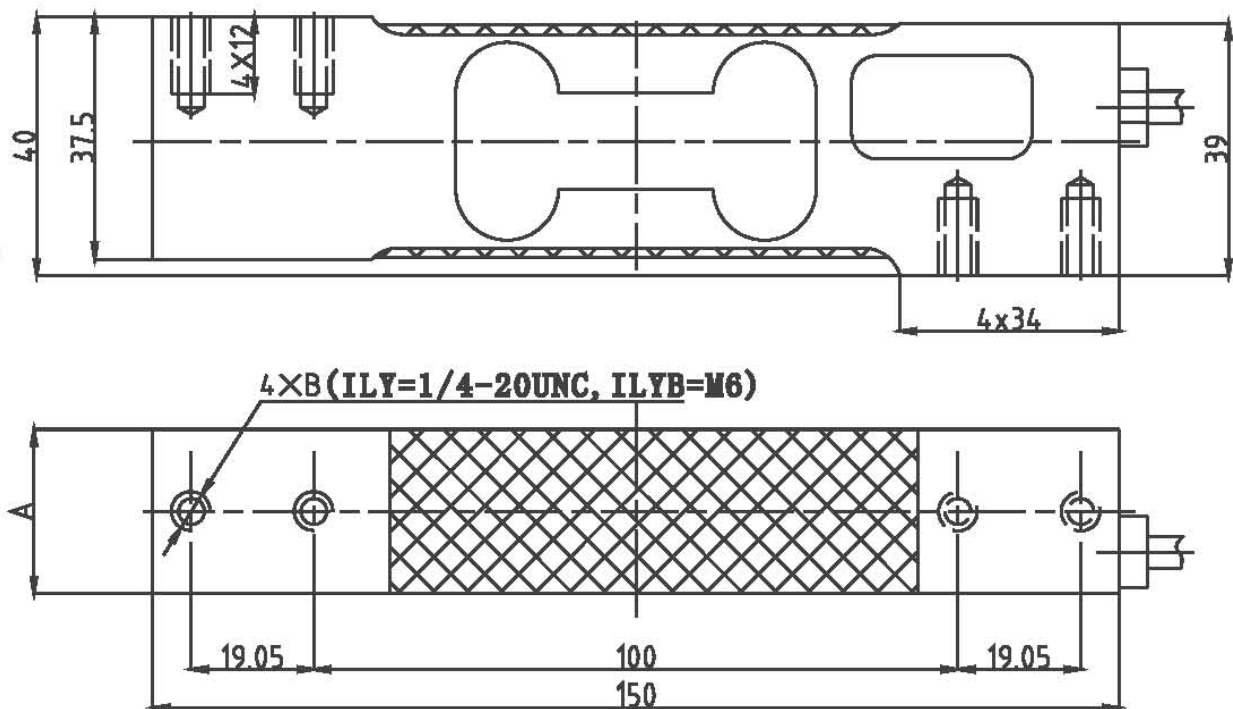


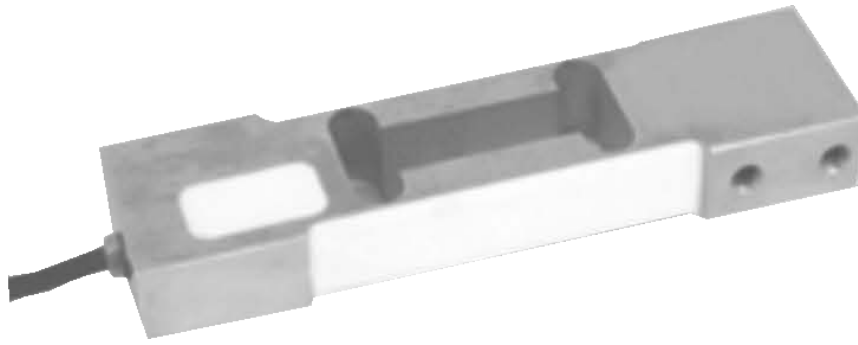

TECHNICAL PARAMETER

Exc+(Red); Exc-(Black); Sig+(Green); Sig-(White)

Rated capacities(Emax)	8,10,15,20,30,50,60,100kg	Insulation resistance	≥5000MΩ
Accuracy class	0.03	Temperature range, Compensated	-10℃ ~+40℃
Sensitivity	2.0±0.2mV/V	Temperature range, Operating	-30℃ ~+70℃
Non-linearity	±0.03%F.S	Maximum safe overload	150%F.S
Hysteresis error	±0.03%F.S	Ultimate overload	200%F.S
Creep error(30min)	±0.02%F.S	Excitation, recommend	10~12VDC
TC ZERO	±0.02F.S/10℃	Protection Class	IP65
TC SPAN	±0.02F.S/10℃	Construction	Alloy Steel; Stainless steel
Input resistance	400±20Ω	Cable Length	1.8m ; Diamerer:5
Output resistance	352±5Ω	Max. platform size	400 x 400mm