




Vehicle Scale, Crane, Lifts

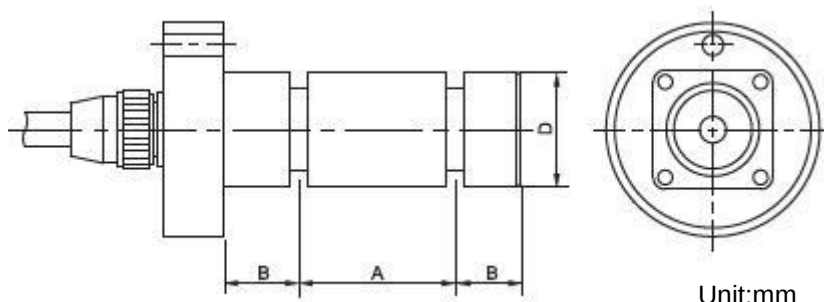

Unit:mm

TECHNICAL PARAMETER

Exc+(Red); Exc-(Black); Sig+(Green); Sig-(White)

Capacity	Customer Design		
Rated Output	1mV/V , 3mV/V	Insulation Lmpendence	≥5000MΩ
Non Linearity	±0.1% F.S.	Compensated Tem.Range	-10℃ ~ +50℃
Hysteresis	±0.01% F.S.	Service Tem.Range	-20℃ ~ +60℃
Repeatability	±0.03% F.S.	Safe Overload Range	120% F.S.
Creep (30min)	±0.05% F.S.	Excitation Voltage	10VDC
Zero Balance	±1.00% F.S.	Protection Class	IP67,IP68
Tem.Effect On zero	±0.1 F.S. / 10℃	Construction	Alloy Steel; Stainless steel
Tem.Effect On Output	±0.1 F.S. / 10℃	Cable Length	3m
Input Lmpendence	385±10Ω		
Out Lmpendence	350±3Ω		