




TECHNICAL PARAMETE

Exc+(Red); Exc-(Black); Sig+(Green); Sig-(White);

Rated load	10, 15, 20, 25, 30, 40, 50t	Insulation resistance	≥5000MΩ
Accuracy class	0.05	Nominal Temp Range	-10°C ~ +40°C
Sensitivity	1.0±0.002mV/V	Service Temp Range	-30°C ~ +70°C
Non-linearity	±0.05%F.S	Safe load limit	150%F.S
Hysteresis error	±0.05%F.S	Breaking load	300%F.S
Creep error(30min)	±0.02%F.S	Nominal of range excitation	10~12 VDC
TC ZERO	±0.03F.S/10°C	Protection Class	IP67
TC SPAN	±0.03F.S/10°C	Material	Alloy Steel; Stainless Steel
Input resistance	650±10Ω	Cable Length	14m
Output resistance	610±3Ω		

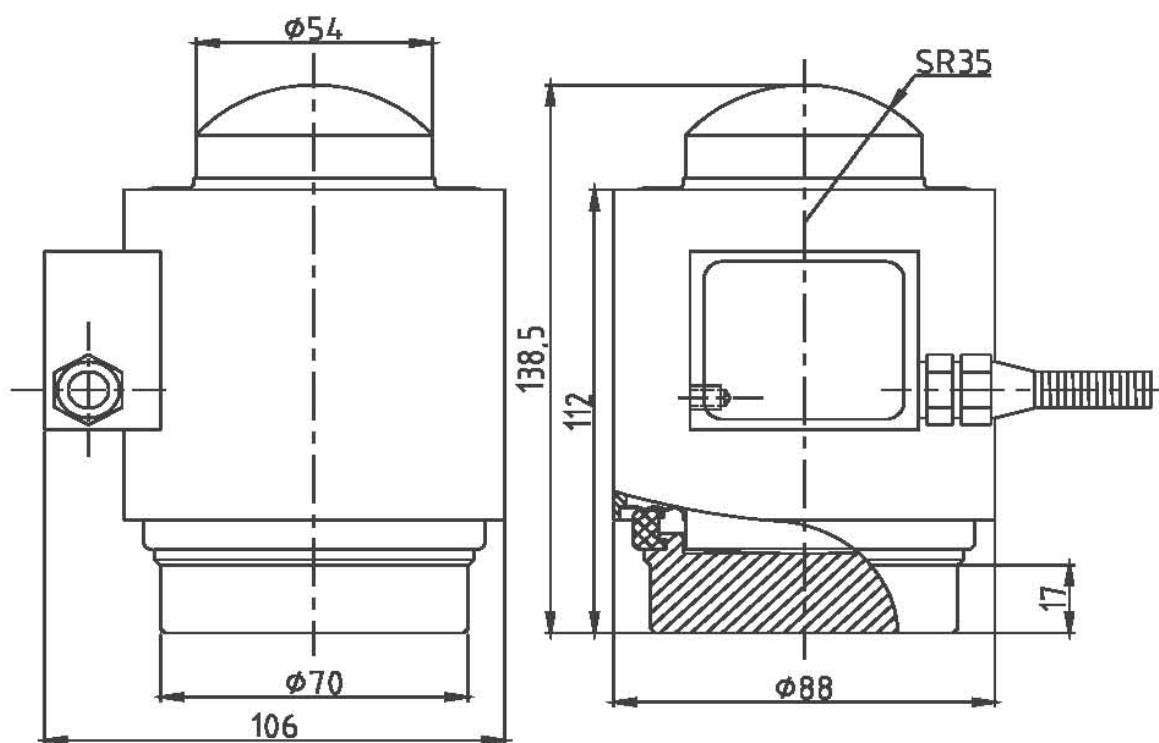