




Rated Load (kg)	D
5, 10, 20, 30, 40, 50, 75, 100, 150, 200, 250	Φ8.2
300, 500	Φ10.2

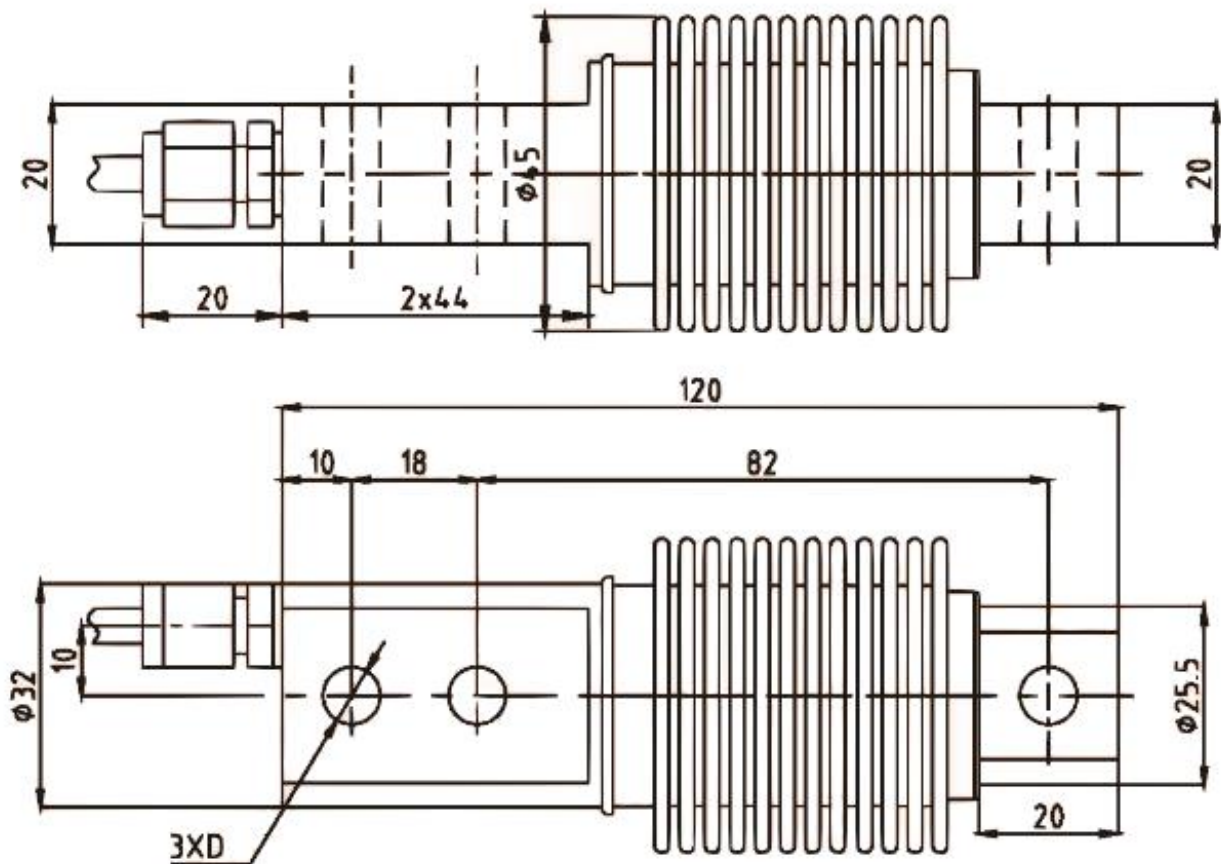

Hopper, scale, belt scale, blending system

TECHNICAL PARAMETE

Exc+(Red); Exc-(Black); Sig+(Green); Sig-(White);

Rated load	5, 10, 20, 30, 40, 50, 75, 100, 150, 200, 250, 300, 500kg		
Accuracy class	C3	Nominal Temp Range	-10°C ~ +40°C
Sensitivity	2.0±0.002mV/V	Service Temp Range	-30°C ~ +70°C
Non-linearity	±0.02%F.S	Safe load limit	150%F.S
Hysteresis error	±0.02%F.S	Breaking load	200%F.S
Creep error(30min)	±0.015%F.S	Nominal of range excitation	10~12 VDC
TC ZERO	±0.015F.S/10°C	Protection Class	IP68
TC SPAN	±0.015F.S/10°C	Material	Alloy Steel
Input resistance	400±20Ω		Stainless Steel
Output resistance	352±3Ω	Cable Length	3m
Insulation resistance	≥5000MΩ		

Weighing Module

Diagram D


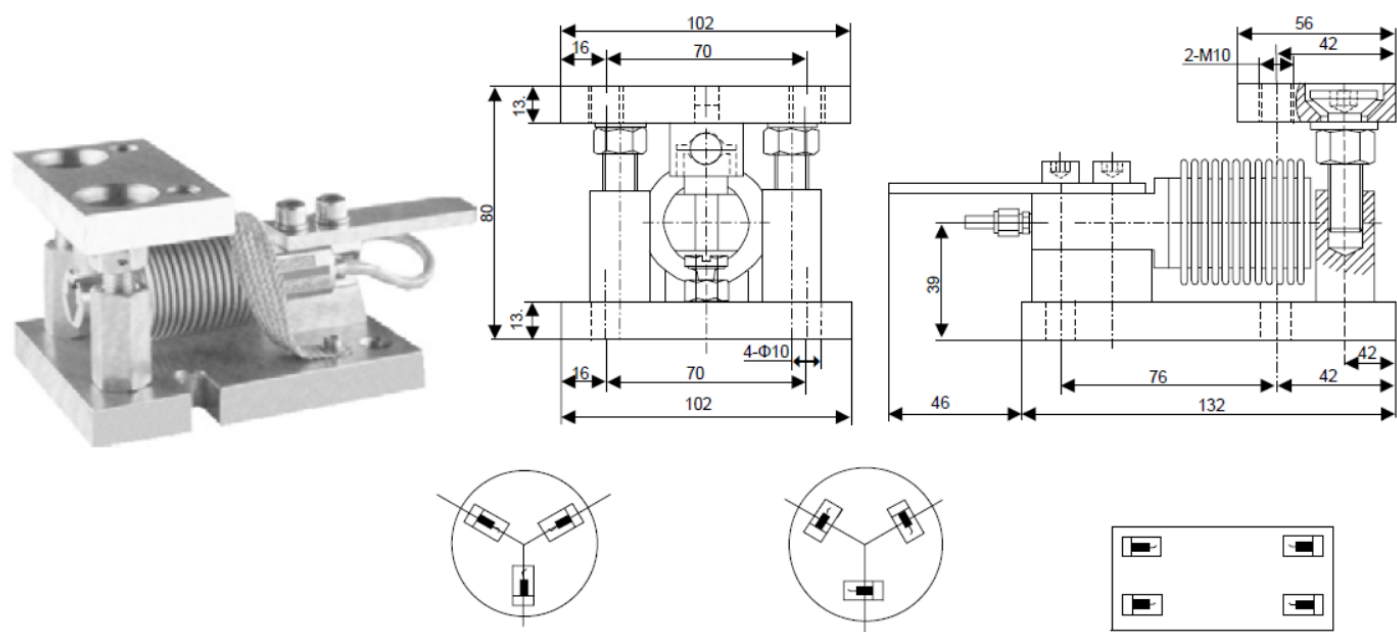


Diagram B

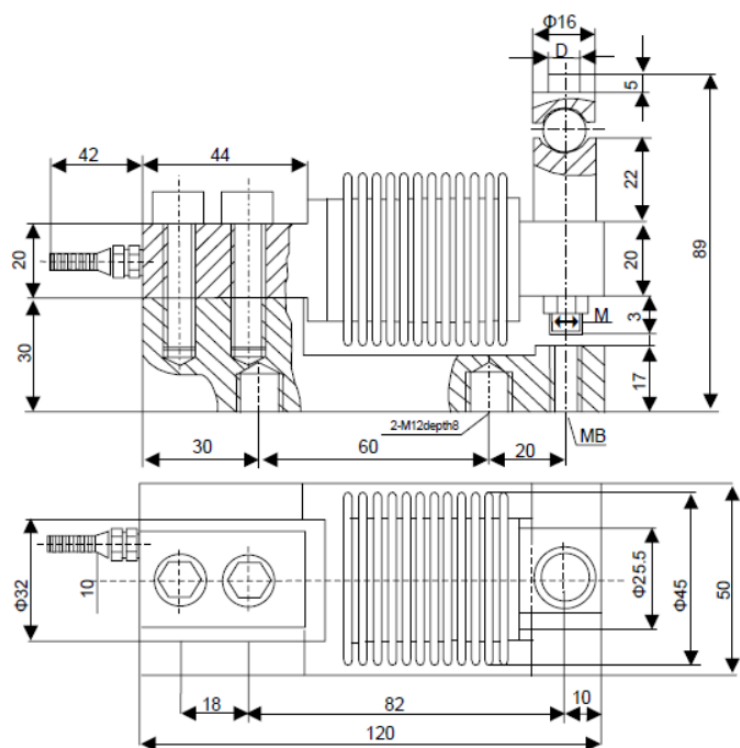

(kg) Rated Load	D	M
5, 10, 20, 30, 40, 50, 75, 100, 150, 200, 250	Φ8	M8
300, 500	Φ10	M10

Diagram C


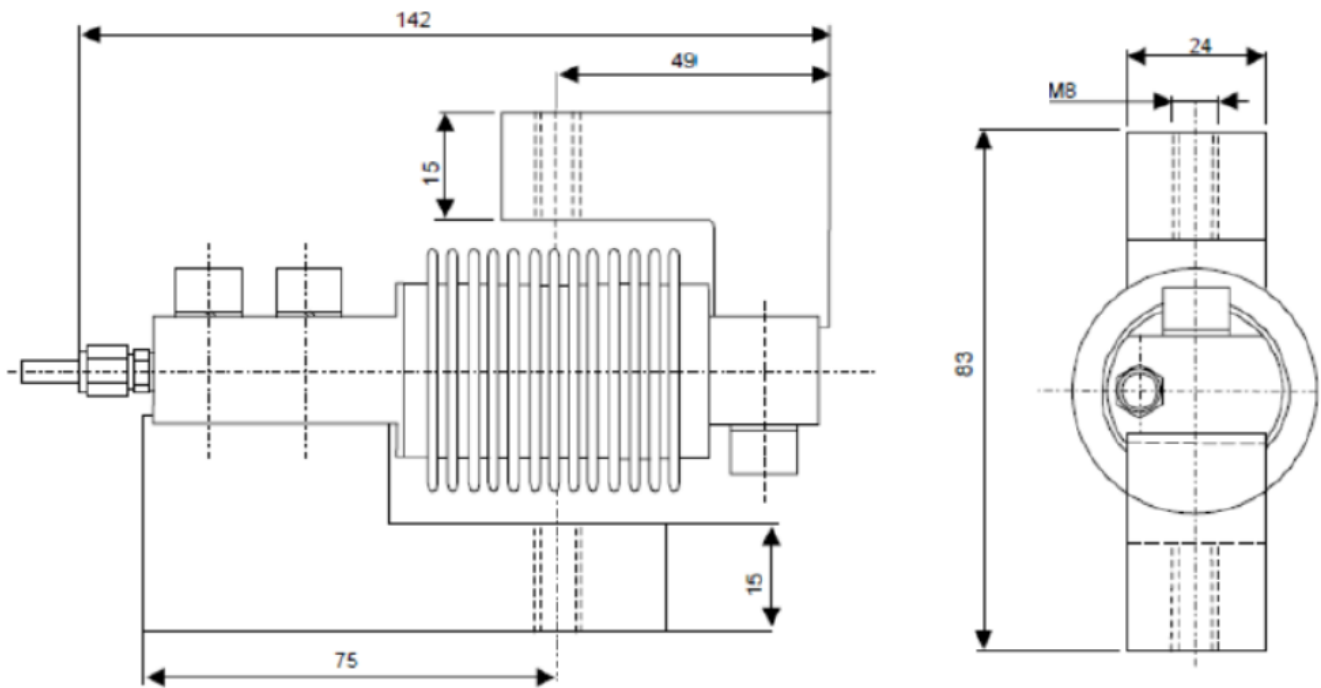


Diagram E

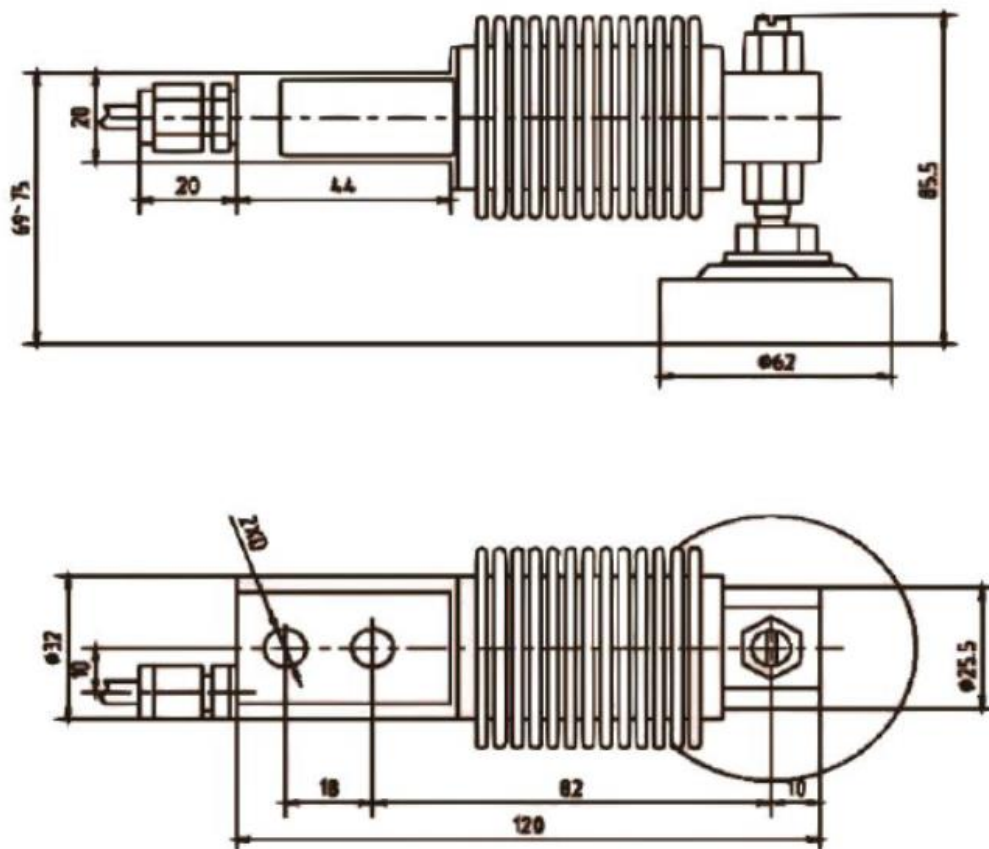

(kg) Rated Load	D
5 · 10 · 20 · 30 · 40 · 50 · 75 · 100 · 150 · 200 · 250 ·	$\Phi 8.2$
300 · 500	$\Phi 10.2$